

DS-KH6320-TE1 Network Indoor Station



- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras

▪ Specification

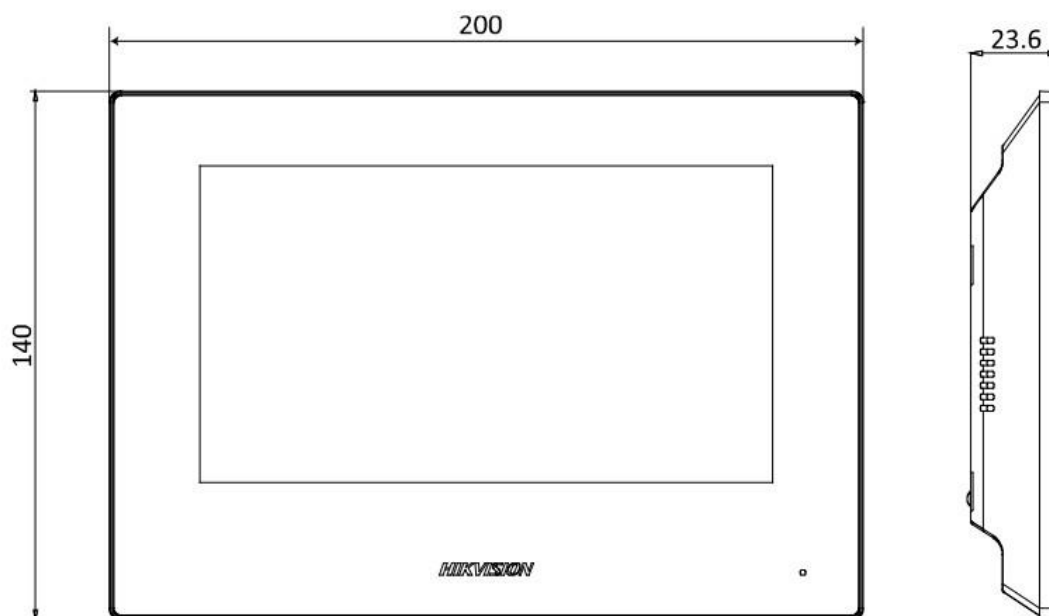
System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	Not supported.
FOV	Not supported.
WDR	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200
Notice capacity	16
Linked indoor station capacity	5
Linked doorphone capacity	8
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	Not supported.
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	/
USB	/
TF card	Max to 128 G, SD 2.0 or lower version

Alarm output	/
Power interface	1
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	With package: 675 g Without package: 350 g
Protective level	/
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimensions	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")
Battery	/
Application environment	Indoor
Power consumption	≤ 6 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

▪ **Available Model**











DS-KH6320-TE1

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

<p>DS-KAW50-1</p>	<p>DS-KD-IN KD8 Series Pro Modular Door Station</p>	<p>DS-KABH6320-T Indoor Station Table Bracket</p>	<p>DS-KD-E KD8 Series Pro Modular Door Station</p>	<p>DS-KD8003-IME1 KD8 Series Pro Modular Door Station</p>
				
<p>DS-KD-BK KD8 Series Pro Modular Door Station</p>	<p>DS-KD-KP KD8 Series Pro Modular Door Station</p>	<p>DS-KAW50-1N</p>	<p>DS-KD-DIS KD8 Series Pro Modular Door Station</p>	<p>DS-KD-M KD8 Series Pro Modular Door Station</p>
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

